




## Tyre inflation systems

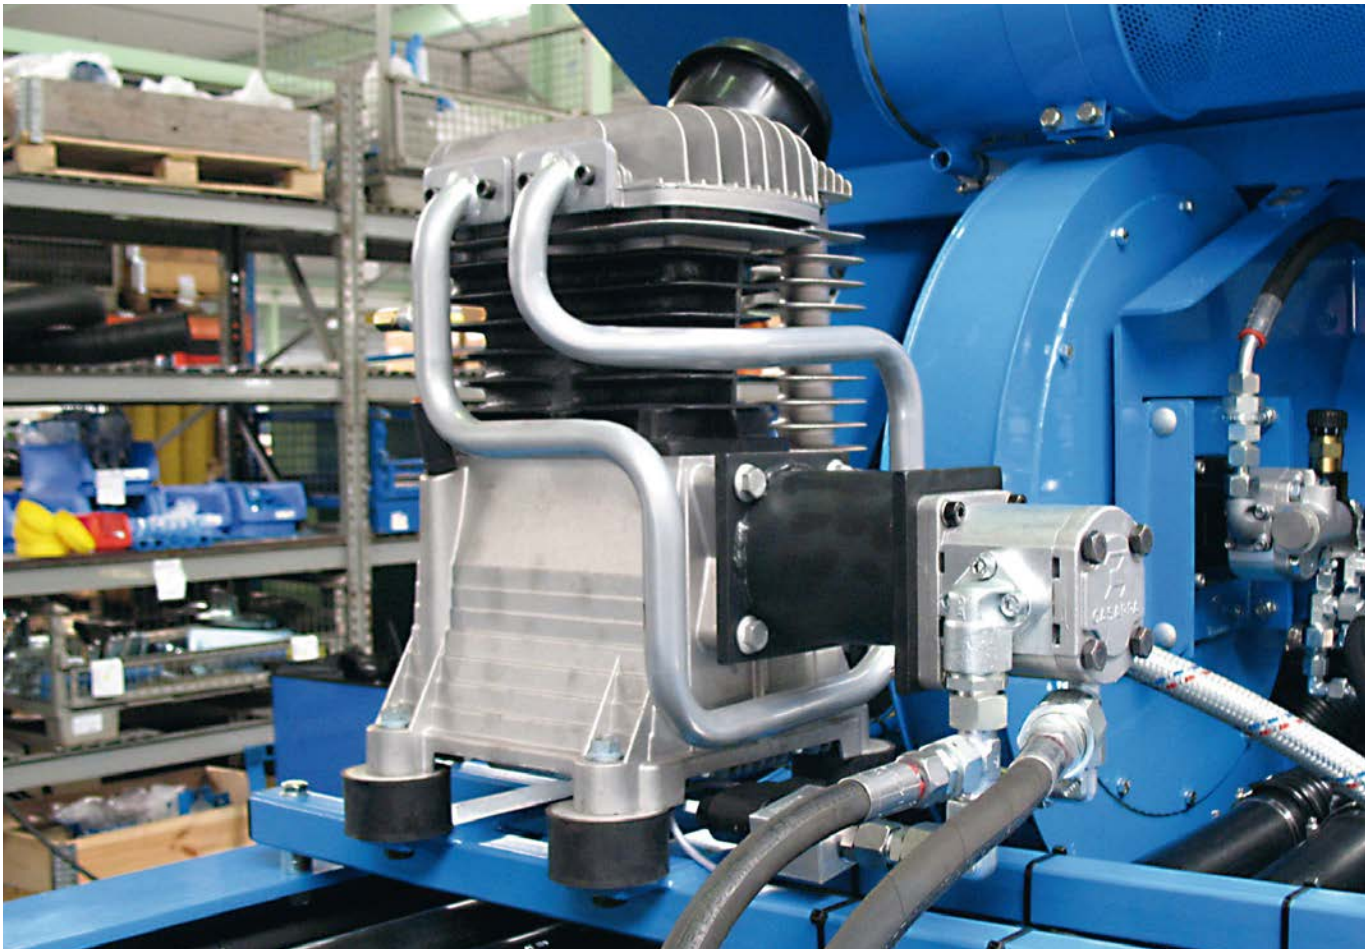

Air supply system K500 (600 l/min)

The hydraulically driven compressor K500 is used for tractors and harvesters without air compressor, but also for trailers and pulled machinery where the number and size of tyres only requires a reason-

able amount of air (e.g. pulled sprayers). The unit is highly compact and requires very little power.

Technical data:


Piston compressor with 2 cylinders, pmax: 7.5 bar

Effective air flow: 600 l/min at 2 bar back pressure

Maximum speed: 1,300 rpm (may require hydraulic safety device)

Oil fill capacity: 2.5 l

Oil consumption of hydraulic motor: approx. 25 l/min

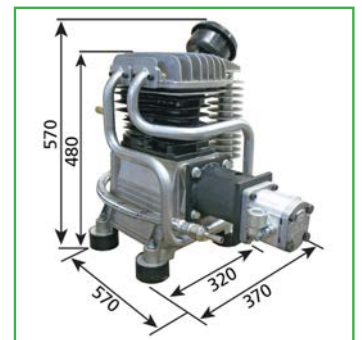

## PTG Reifendruckregelsysteme GmbH

Habichtweg 9 · D-41468 Neuss/Germany  
Tel.: 00 49 (0) 21 31 - 52376 - 0 · Fax: 00 49 (0) 21 31 - 5 23 76 79  
E-Mail: [ptg@ptg.info](mailto:ptg@ptg.info) · [www.ptg.info](http://www.ptg.info)